

SHARP®

PN-H801
4K Ultra-HD LED Monitor

A 4K Ultra-HD Display that will Take Your Breath Away




Conveying Dynamic Images with Accurate Color Reproduction

The 80" Class (80" diagonal) PN-H801 display commands attention. This mighty 4K Ultra-HD display features an LED backlight with an expanded color gamut that supports a wide range of colors. Whatever the indoor venue, this dynamic display works tirelessly to reach your target audience, conveying your message with larger-than-life realism and an incredibly precise expression of color and detail.




Stunning 4K Ultra-HD Image Quality

The PN-H801 display is a communication platform with a huge presence. Sized for eye-grabbing impact, this 80" (80" diagonal) Class 4K Ultra-HD monitor boasts an impressive level of image quality that allows it to showcase all manner of content, from detailed text to beautifully textured graphics. With four times the pixel resolution of full HD, the PN-H801 display delivers all the detail, depth and clarity that the content creator intended. Excelling in any indoor venue—for example, in a retail setting, meeting room, or control center—this is one monitor that supports precise communications with any audience.

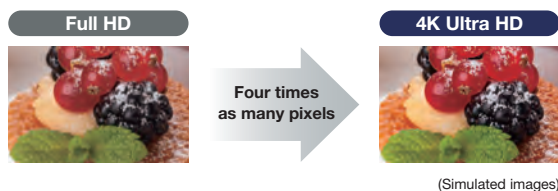

4K Ultra-HD Reveals the Finest Details


Despite the massive scale of the PN-H801 display, onscreen content is rendered in superbly detailed ultra-high definition. With videos and photos displayed at up to 4K Ultra-HD, you get to see subtle textures and fine details not visible at full HD resolution. The high pixel count means there's no need to worry about jaggies, even on such a large screen.

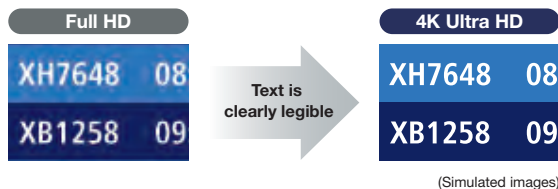

Outstanding Color Reproduction

The PN-H801 display boasts an LED backlight that supports a wide color gamut. This combines with the panel's advanced picture quality adjustment features to deliver rich, vivid images with greater realism. Compared to a conventional full HD model*, the PN-H801 display has an approximately 20 percent larger sRGB color gamut range (area ratio). You'll see a wider range of color, especially captivating reds and greens.

* The Sharp PN-E802 display.

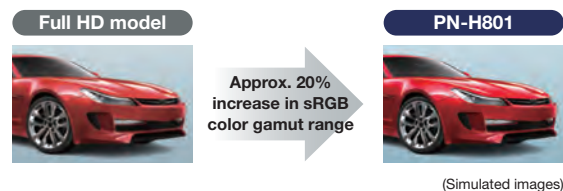

An Ever-Ready 4K Ultra-HD Display

4K Ultra-HD Upscaling and Offset Function

The PN-H801 is equipped with an advanced upscaling engine that upscales standard full HD content into 4K images, in real-time. An offset function minimizes blurriness and jaggies to make expanded images smoother than with standard upscaling.

4K Ultra-HD Transfer at 60 fps via Single Cable

The PN-H801 display supports the features defined in the HDMI™ input specification, which enable stunning 4K Ultra-HD 60p video signals to be transmitted conveniently over a single cable. The monitor features four HDMI inputs that enable easy switching between multiple sources.

USB Media Player for PC-Less Playback

The PN-H801 can be set up to play slideshows and videos without the need for a PC. A built-in USB media player allows playback of 4K Ultra-HD photos*1, full HD videos, and music stored on a connected USB memory device*2. Photos can also be saved to and played from the PN-H801 display's internal memory. For added security, the PN-H801 display comes with a USB drive cover to prevent theft of the data storage device. The media player's auto play function enables photos and videos to be played automatically.



Supported media formats: JPEG for photos; MP4, M2TS, 3GP, and MOV for videos; and WAV, WMA, M4A, and MP3 for music.

*1 Supports input of 8K-equivalent photos (displayed at 4K).
*2 USB storage device sold separately.

Stable and Reliable Professional Operation

Choice of Installation Mode

The PN-H801 display offers a choice of landscape or portrait installation, allowing you to select the mode that best suits your display content and application. While portrait installation offers the look and impact of a poster, landscape installation puts wide images on vivid display. Portrait installation of this nearly six-foot-high monitor allows you to showcase life-size images of people.

24/7 Operation

Designed for around-the-clock use and rugged operating conditions, the PN-H801 display is a reliable and commanding presence in demanding 24-hour professional applications. Even after long hours of continuous operation, this monitor delivers a sharp, clear picture. The PN-H801 display excels in public spaces such as commercial facilities, stations and airports, as well as in monitoring rooms.

Note: If a static image is displayed continuously for an extended period, image persistence may result. This can be removed gradually by displaying a video or moving graphics.

LAN/RS-232C Control

Thanks to its LAN/RS-232C interface, the PN-H801 display can be easily controlled and monitored from a central location via a PC. Content can be conveniently distributed using optionally available Sharp Digital Signage Software (SDSS).

Note: Functions that can be controlled via LAN/RS-232C are limited. Some systems require an individual PC to control each monitor.



Impressive Design and Easy Installation



Stylish Design


The PN-H801 display boasts an ultra-slim bezel that measures just 16 mm on the right, left-, and top, and 21 mm on the bottom. The elegant and understated bezel helps the display to blend in naturally with its surroundings.

Built-In Speakers

Built-in speakers eliminate the need for external speakers and keep the PN-H801 display stylishly streamlined.

Lightweight and Easy to Install

The PN-H801 monitor weighs only 119 lbs, which makes for easy placement. To help ensure safe handling of a PN-H801 monitor, all four of its corners are fitted with robust carrying handles. Together with the monitor's light weight, these handles help enable safe transport and easy, time-saving installation.



A Wide Range of Professional Applications



Meeting room



Hospitality/retail setting




Simulation training room

Specifications

Model Name		PN-H801
Installation		Landscape / Portrait
LCD Panel	80" Class (80" diagonal) TFT LCD	
	Max. Resolution	3,840 x 2,160 pixels
	Max. Display Colors (approx.)	1.06 billion colors
	Pixel Pitch (H x V)	0.464 x 0.464 mm
	Max. Brightness ^{*1*2}	440 cd/m ²
	Contrast Ratio	4,000 : 1
	Viewing Angle (H/V)	176°/176° (CR ≥ 10)
	Active Screen Area (W x H)	70 1/8" x 39 7/16"
	Response Time	6 ms (grey to grey, avg.)
Computer Input	Backlight	LED, full-array
	Video	HDMI , Analog RGB
	Synchronization ^{**}	Horizontal/vertical separate (TTL: positive/negative)
Plug & Play		VESA DDC2B
Input Terminals ^{*3}		HDMI x 4: (HDCP1.4 compatible: HDMI 1 – HDMI 3), (HDCP2.2 compatible: HDMI 4), (ARC compatible: HDMI 1), (MHL compatible: HDMI 4), Mini D-sub 15-pin x 1, RS-232C x 1 ^{*4*5} , USB x 1 (photo, video, music) ^{*6} , 3.5 mm-diameter mini stereo jack x 1
Output Terminals ^{*3}		Digital audio output (optical) x 1, 3.5 mm-diameter mini stereo jack x 1
Input /Output Terminals ^{*3}		LAN: 10Base-T/100BASE-TX x 1
Built-in Speakers		10 W + 10 W
Internal Memory		400MB
Mounting		VESA (4 points), 23 5/8" x 15 3/4" pitch, M6 screw
Power Supply		100V – 240V AC, 50/60 Hz
Power Consumption		490 W
Environmental Conditions	Operating Temperature	0°C to 40°C
	Operating Humidity	20% to 80% RH (no condensation)
Dimensions (W x D x H) (approx.) (display only)		71 1/2" x 4 1/2" x 41 1/8"
Weight (approx.)		119 lbs
Main Accessories		Remote control unit x 1, cable clamp x 4, cable clamp (insertion type) x 1, power cord x 1 (3-pin ^{*7}), DisplayPort1.2 to HDMI conversion cable x 1, LR-6 battery (AA size) x 2, CD-ROM x 1, setup manual x 1, power cord clamp x 1, USB flash drive cover x 1, vertical sticker (operation panel) x 1, horizontal sticker x 1, RS-232C conversion cable (3.5 mm-diameter mini stereo jack) x 1, USB extension cable x 1


^{*1} Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness.
^{*2} When installing the monitor in the portrait orientation, and the internal temperature of the monitor rises excessively, the brightness of the backlight automatically decreases in order to prevent a further temperature rise. ^{*3} Use a commercially available connection cable for PC and other video connections. ^{*4} Requires the bundled RS-232C conversion cable. ^{*5} Only for command control. ^{*6} Supported media formats: JPEG for photos; MP4, M2TS, 3GP, and MOV for videos; and WAV, WMA, M4A, and MP3 for music. ^{*7} Use a 3-pin compatible power outlet.
^{**} Sync-on green and composite sync are not supported.
Note: USB storage device sold separately. Max. size of USB device (incl. terminal) usable with drive cover: 2" x 3/4" x 1/2" (L x W x H).

Dimensions

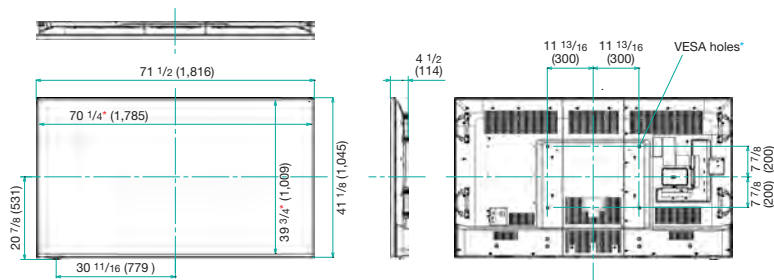

Units: inch (mm)
^{*} Screen dimensions
^{*} To use the VESA-standard mounting bracket, use M6 screws that are 8 to 10 mm plus the thickness of the bracket.

Input/Output Terminals

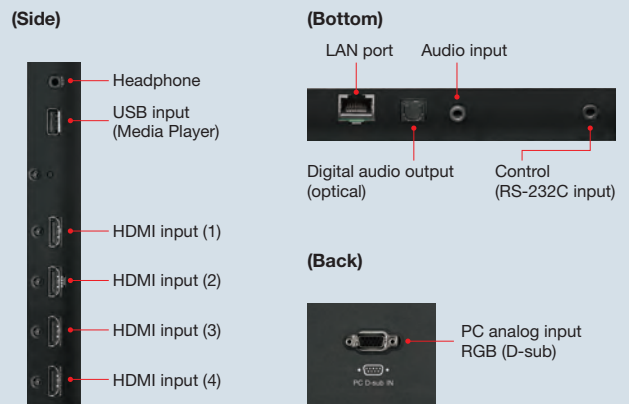

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

MHL
Mobile High-Definition Link

SHARP®

SHARP ELECTRONICS CORPORATION
100 Paragon Drive, Montvale, NJ 07645
1-800-BE-SHARP • www.sharppusa.com

Product specifications and designs are subject to change without notice. Sharp is a registered trademark of Sharp Corporation. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. MHL, the MHL logo, and Mobile High-Definition Link are trademarks or registered trademarks of MHL, LLC in the United States and other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. All screen images appearing in this brochure are simulated.