

# Savin®

# CLP340D

Color Laser Printer

EFFICIENT > RELIABLE > FLEXIBLE > COLOR > **CONTROL >**



**Keep more color jobs  
in-house and reduce  
total cost of ownership.**

## Take control of your documents.

The SAVIN® CLP340D Series Color Laser Printer helps offices bring more full-color documents in-house and regain control of your budget. This cost-effective printer produces a wide variety of jobs on all kinds of media, with in-line finishing. As a result, you can reduce outsourcing costs without sacrificing document quality or visual appeal. The Savin CLP340D Series is based on a successful, market-proven design. That means you can expect high reliability and easy maintenance, plus helpful device management and security tools. All from a network printer that offers exceptional productivity and a total cost of ownership that ranks among the lowest in its class.

### Improve In-House Productivity

The Savin CLP340D Series is one of the most productive color printers on the market today.

- Print presentations, reports, brochures and other documents quickly. This printer delivers 40 pages-per-minute speed for full-color and black & white output.
- Cut wait time. Expect your first color print in nine seconds, or just eight seconds for black & white. Warm-up time is less than a minute.
- Meet the demands of a large office without frequent paper refills. This printer holds up to 3,200 sheets with all trays and options.
- Prevent document mix-ups with a 4-Bin Mailbox that allows shared access to the printer and maintains user privacy.
- Reprint forms and other frequently used documents instantly with the optional 80 GB Hard Disk Drive (HDD), which enables a full line of print-on-demand choices.

### Long-Lasting Reliability

The Savin CLP340D Series combines high durability with low total cost of ownership (TCO).

- Ensure flawless operation for the long haul. This reliable printer has a monthly duty cycle that easily outperforms the competition and supports heavy use.
- Enjoy smooth, uninterrupted print runs with a shorter, soft curve paper path that easily accommodates heavy stocks and makes it simple to clear jams.
- Produce more color output while keeping your budget under control with low operating costs and high-yield consumables.

### Tight Security, Easy Management

Protect confidential documents and make life much easier for IT.

- Reduce the risk of color printing being abused. Administrator and user authentication provides accountability and helps prevent unauthorized access.
- Keep documents secure if the hard drive is stolen. The DataOverwriteSecurity System (DOSS) option overwrites hard drive data after every print job.

# CLP340D Series Color Laser Printer

**EFFICIENT >** **RELIABLE >** **FLEXIBLE >** **COLOR >** **CONTROL >**

## Automatic Duplexing (Standard)

Save paper and filing space with standard automatic duplexing that runs at virtually the same speed as one-sided output.

## 4-Bin Mailbox (Optional)

Keep documents from multiple users separate with the 4-Bin Mailbox.

## 1,000-Sheet Booklet Finisher (Optional)

Produce full-color booklets cost-effectively with the in-line Booklet Finisher.

## 3,000-Sheet Finisher (Optional)

Take advantage of high-volume, professional-quality, multi-position stapling with the 3,000-Sheet Finisher. Add the optional Hole Punch Unit for even more flexibility.

## Paper Trays (Standard)


Load up to 1,200 sheets with two standard 550-Sheet Paper Trays and a 100-Sheet Bypass Tray.

## Paper Feed Units (Optional)

Add up to 1,100 sheets with one or two optional 550-Sheet Paper Feed Units.

## Large Capacity Tray (Optional)

Maximize total paper capacity with the 2,000-Sheet Large Capacity Tray.

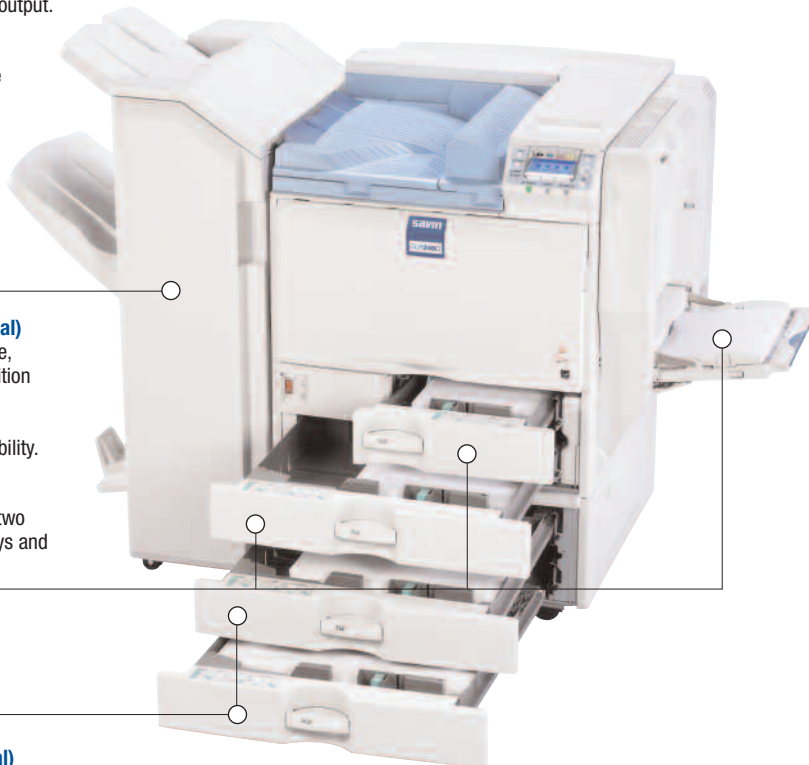

Dramatically reduce the need for outsourcing by printing an incredible variety of full-color documents in-house.



The printer's smart, accessible design makes it easy for anyone to replace the toner cartridges.

- Maximize your technology investment across the entire organization with the embedded @Remote solution, an advanced device utilization and fleet reporting utility.
- Configure network settings, browse printer status, manage administrator/user authentication settings and even view system status, such as paper and supply levels, with utilities like Web Image Monitor.
- Expand your capabilities with heavier paper stock. All paper trays accept weights up to 140 lb. Index in simplex mode and up to 90 lb. Index in duplex mode.
- Publicize events with full-color banners up to 12" wide and 49.6" long.
- Staple reports, strategic plans and other documents with the 3,000-Sheet Finisher. Add the Hole Punch Unit to prepare output for insertion in three-ring binders.
- Produce high-impact, full-color training, education and marketing materials with folding and saddle-stitching using the 1,000-Sheet Booklet Finisher.

## Outstanding Flexibility

Produce booklets, flyers, handouts, banners, and more.

- Select the ideal resolution for any job. Optimize color quality for shadow detail and skin tones with 4-bit color and interpolated resolution up to 9600 x 600 dpi.

## The Total Green Office Solution

Savin continues its long-standing commitment to developing office solutions with environmentally friendly and superior energy- and supply-saving features, without compromising productivity.





## EFFICIENT > RELIABLE > FLEXIBLE > COLOR > CONTROL >

### SYSTEM SPECIFICATIONS

Configuration Technology	Desktop Laser-beam scanning & electrophotographic printing with dual component toner development, 4-drum tandem method
Printing Speed	40-ppm black & white and full-color
Warm-Up Time	35 seconds
First Print Speed	Black & white: 8 seconds or less Full-color: 9 seconds or less
Duplex Print Speed	Near 100% productivity for all paper sizes
Print Resolution	600 x 600-dpi (1-bit) 600 x 600-dpi (2-bit) (Default) 600 x 600-dpi (4-bit) 1200 x 1200 dpi (1-bit)
Standard Input Capacity	CLP340D (Base): 2 x 550 sheets + 100-Sheet Bypass Tray* CLP340DT1**: 3 x 550 sheets + 100-Sheet Bypass Tray

Maximum Paper Capacity: 3,200 Sheets when Base model is configured with optional LCT.

\*Can be configured with 550 x 1 Paper Feed Unit; 550 x 2 Paper Feed Unit, Large Capacity Tray or FAC33 Large Cabinet Stand.

\*\*Can be configured with 550 x 2 Paper Feed Unit or FAC35 Stand.

Output Capacity  
Standard: 500 sheets face down  
Optional: 3,000-Sheet Finisher, 1,000-Sheet Booklet Finisher or 4-Bin Mailbox  
Maximum: 4,000-sheet stack capacity (with 3,000-Sheet Finisher and 4-Bin Mailbox)

Paper Sizes  
First Paper Tray: 8.5" x 11"  
Second Paper Tray: 7.17" x 5.83" – 11" x 17"  
Bypass Tray: Width: 3.5" – 12", Length: 5.8" x 49.6"  
Optional Large Capacity Tray: 8.5" x 11"  
Optional Paper Feed Units: 7.17" x 5.83" – 11" x 17"

Paper Weights  
Standard & Optional Paper Feed Units, Large Capacity Tray: 16 – 68 lb. Bond/140 lb. Index (60 – 256 g/m<sup>2</sup>)  
Bypass Tray: 16 – 68 lb. Bond/140 lb. Index (60 – 256 g/m<sup>2</sup>) (Source for Labels, OHP, and Envelopes)  
Duplex Unit: 16 – 45 lb. Bond/90 lb. Index (60 – 169 g/m<sup>2</sup>)

Paper Types  
Bond, Plain, Recycled, Preprinted, Special, Color, Letterhead, Card Stock, Glossy, Coated, Labels, OHPs and Envelopes  
Standard  
Auto Duplex  
Dimensions (WxDxH) (Base Model)  
26.4" x 26.4" x 25.2" (670 x 670 x 640 mm) (Standard Configuration)  
Weight (Base Model)  
Less than 213 lb. (97 kg)  
Power Requirements  
Operating Power  
Consumption  
890W  
Maximum Power  
Consumption  
1440W  
Energy Saver  
2.2W

### PRINTER CONTROLLER SPECIFICATIONS (STANDARD)

CPU	Intel Celeron M @ 600MHz
Memory	Base/T1 Configurations: Standard 512 MB RAM/Maximum 1,024 MB RAM 80 GB HDD Optional on all models
Hard Disk Drive	PCL 5c, PCL 6, RPCS, Adobe® PostScript® 3™, PDF Direct Print
Printer Languages	Standard: 45 PCL fonts, 13 International fonts, 136 PostScript 3 fonts Optional: OCR and Barcode fonts available
Fonts	10/100Base-TX Ethernet (RJ-45), USB 2.0, USB Host I/F
Standard Interfaces	IEEE 1284 Interface Board Type A IEEE 802.11a/b/g Wireless LAN Type J Bluetooth Wireless Interface Type 3245 Gigabit Ethernet Board Type B
Optional Interfaces*	

\*Only one additional interface can be installed.

Network Protocols	Standard: TCP/IP (IPv4, IPv6), SMB, AppleTalk Optional: IPX/SPX
Operating Systems	Windows 2000/XP/Server 2003/ Server 2008/Vista; Novell NetWare 3.12, 3.2, 4.1, 4.11, 5.0, 5.1, 6, 6.5; UNIX (using Savin UNIX filter Phase 11): Sun Solaris, HP-UX, SCO OpenServer, RedHat Linux, and IBM AIX; Citrix Metaframe, Mac OS 8.6 – 9.2x, OS X10.1 or later; SAP R/3 3.x or later RPCS, PCL5c, PCL6: Windows 2000/XP/Server 2003/Vista/Server 2008 XPS: Windows Vista/Server 2008 PostScript: Windows 2000/XP/Server 2003/Vista/Server 2008, Macintosh 8.6 or later, OS X (v. 10.1, 10.2, 10.3) SmartDeviceMonitor for Admin and Client; Web SmartDeviceMonitor (Optional); Web Image Monitor; DeskTopBinder V2 Lite; Print Utility for Mac; Agfa Font Manager 2000
Drivers	
Utilities	

### CONTROLLER OPTIONS

**Printer Hard Disk Drive Type 820**  
**Camera Direct Print Card Type F** – Enables direct printing from a PictBridge™ enabled digital camera, without a PC.  
**VM Card Type K for ESA™**  
**BB-HPL10A-R HD-PLC Ethernet Adaptor**  
**Network Card Type A**  
**Memory Options**  
Memory Unit Type J 256 MB RAM  
Memory Unit Type J 512 MB RAM

### SECURITY FEATURES

**DataOverwriteSecurity System Type M (Optional)** – Security feature that overwrites latent data on the system's hard drive after scan and print jobs  
**HDD Encryption Unit Type D (Optional)** – Encrypts data on HDD, so data is secure even if HDD is stolen  
**Other Security Features**  
Network Protocols ON/OFF, Administrator Authentication, Job Log/Job Access, IP Address Filtering, User Account Registration, User Authentication, Wi-Fi Protect Access (WPA), Kerberos, 802.1X Wired Authentication, 128-bit Secure Socket Layer, SNMP v3 Encryption, IPsec Communication, Locked Print Password Encryption, Unauthorized Copy Control and Mask Type for Copying

### HARDWARE ACCESSORIES

<b>Two-Tray Paper Feed Unit (PB3040)</b>	
Paper Capacity	1,100 sheets (550 x 2)
Paper Sizes	7.17" x 5.83" – 11" x 17"
Paper Weights	16 – 68 lb. Bond/140 lb. Index (60 – 256 g/m <sup>2</sup> )
<b>One-Tray Paper Feed Unit (PB3080)</b>	
Paper Capacity	550 sheets (550 x 1)
Paper Sizes	7.17" x 5.83" – 11" x 17"
Paper Weights	16 – 68 lb. Bond/140 lb. Index (60 – 256 g/m <sup>2</sup> )
<b>Large Capacity Tray (LCT) (PB3050)</b>	
Paper Capacity	2,000 sheets (1,000 x 2)
Paper Sizes	8.5" x 11" LEF
Paper Weights	16 – 68 lb. Bond/140 lb. Index (60 – 256 g/m <sup>2</sup> )

**FAC33 Cabinet Stand (Large)**  
Note: The Cabinet Stand or a paper supply option must be selected for Base Model installation when the printer is to be configured with a Finisher.

**FAC35 Stand (Small)**  
Note: The Stand must be selected for the CLP340DT1 installation when the printer is to be configured with a Finisher.

**3,000-Sheet Finisher (SR3030)\***  
Paper Sizes  
5.5" x 8.5" – 11" x 17", 12" x 18"  
Proof Tray: 14 – 43 lb. Bond/90 lb. Index (52 – 163 g/m<sup>2</sup>); Shift Tray: 14 – 68 lb. Bond/140 lb. Index (52 – 256 g/m<sup>2</sup>)  
Stack Capacity Proof Tray:  
250 sheets (8.5" x 11" or smaller), 50 sheets (8.5" x 14" or larger); Shift Tray: 3,000 sheets (8.5" x 11" LEF), 1,500 sheets (8.5" x 11" SEF, 8.5" x 14", 11" x 17", 12" x 18"), 100 sheets (5.5" x 8.5")

Staple Capacity  
50 sheets (8.5" x 11" SEF), 30 sheets (8.5" x 14" or larger, 8.5" x 11" LEF)  
Staple Paper Sizes  
8.5" x 11" – 11" x 17"  
Staple Paper Weights  
17 – 24 lb. Bond (64 – 90 g/m<sup>2</sup>)  
Staple Positions  
1 staple/3 positions; 2 staples/1 position  
**SR3030 Finisher Options**  
2/3-Hole Punch Unit Type 3260  
Jogger Unit Type 3260  
\*Requires Bridge Unit BU3030.

**1,000-Sheet Booklet Finisher (SR3000)\***  
Paper Sizes  
5.5" x 8.5" – 11" x 17", 12" x 18"  
Paper Weights  
Upper Proof Tray: 14 – 28 lb. Bond (52 – 105 g/m<sup>2</sup>); Shift Tray: 14 – 68 lb. Bond/140 lb. Index (52 – 256 g/m<sup>2</sup>)  
Upper Proof Tray: 100 sheets (8.5" x 11" or smaller), 50 sheets (8.5" x 14" or larger); Shift Tray: 1,000 sheets (8.5" x 11"), 500 sheets (8.5" x 14" or larger, 8.5" x 11" LEF), 100 sheets (5.5" x 8.5"); Booklet Tray: 20 sets (2 – 5 sheets/set, all sizes, saddle-stitched) or 10 sets (6 – 10 sheets/set, all sizes, saddle-stitched)

Staple Capacity  
50 sheets (8.5" x 11" or smaller), 30 sheets (8.5" x 14" or larger)  
Staple Paper Sizes  
8.5" x 11" to 11" x 17" (Normal Staple)  
8.5" x 11", 8.5" x 14", 11" x 17" (Saddle Stitch)  
Staple Paper Weights  
17 – 24 lb. Bond (64 – 90 g/m<sup>2</sup>)  
Staple Positions  
1 staple/2 positions; 2 staples/1 position  
**SR3000 Finisher Options**  
2/3-Hole Punch Unit Type PU300  
\*Requires Bridge Unit BU3030.

**4-Bin Mailbox Type C820\***  
Number of Bins  
4  
Capacity Per Bin  
125 sheets  
Paper Size  
5.5" x 8.5" to 11" x 17"  
Paper Weight  
16 – 34 lb. Bond (60 – 128 g/m<sup>2</sup>)  
\*Can be installed simultaneously with both the 1,000-Sheet Booklet Finisher and 3,000-Sheet Finisher.  
Must be installed with either the PB3040 or the PB3050 LCT.

**SUPPLIES**  
**Consumables**  
Black Toner<sup>1</sup>  
Yellow Toner<sup>1</sup>  
Magenta Toner<sup>1</sup>  
Cyan Toner<sup>1</sup>  
Photoconductor Unit  
Black  
Photoconductor Unit<sup>2</sup>  
Color  
Waste Toner Bottle  
Intermediate Transfer Unit<sup>3</sup>  
Fusing Unit<sup>3</sup>

**Yield**  
20,000 pages @ 5%  
15,000 pages @ 5%  
15,000 pages @ 5%  
15,000 pages @ 5%  
40,000 pages  
40,000 pages  
40,000 pages  
160,000 pages  
120,000 pages  
<sup>1</sup>Based on A4 letter 5% test chart; 3 pages/job; Cyan, Magenta and Yellow (color printing only).  
<sup>2</sup>Based on A4 letter 5% test chart; 3 pages/job; Color Drum Unit (color printing only).  
<sup>3</sup>Based on A4 letter 5% test chart; 3 pages/job.

CLP340D and CLP340DT1 ship with starter toner cartridges that yield 10,000 pages for Black and 8,000 pages for each Color @ 5% coverage.

For maximum performance and yield, we recommend using genuine Savin parts and supplies.  
Specifications subject to change without notice.

**PANTONE® SUPPORT**  
PANTONE Profiles and Look-up Tables will be available in Summer, 2009.  
**WARRANTY**  
The Savin CLP340D Series is under warranty against defects for a period of one year from the date of purchase. Consumables are under warranty for a period of 90 days from the date of purchase or until depleted, whichever ever comes first. Please refer to warranty document shipped with the product for more details.

### Bringing Savin Value to Your Organization

Savin technology offers a diverse portfolio of solutions to help your organization stay competitive and move ahead. Let Savin show you how to empower your business to improve critical processes, keep information secure, ensure compliance and promote environmental sustainability while reducing the total cost of ownership.

Savin Five Dedrick Place, West Caldwell, NJ 07006  
SAVIN® is a registered trademark of Ricoh Americas Corporation. All other trademarks are the property of their respective owners. Print speed may be affected by network, application or PC performance. Specifications and external appearances are subject to change without notice. Products are shown with optional features.

