


PRODUCT SPECIFICATIONS

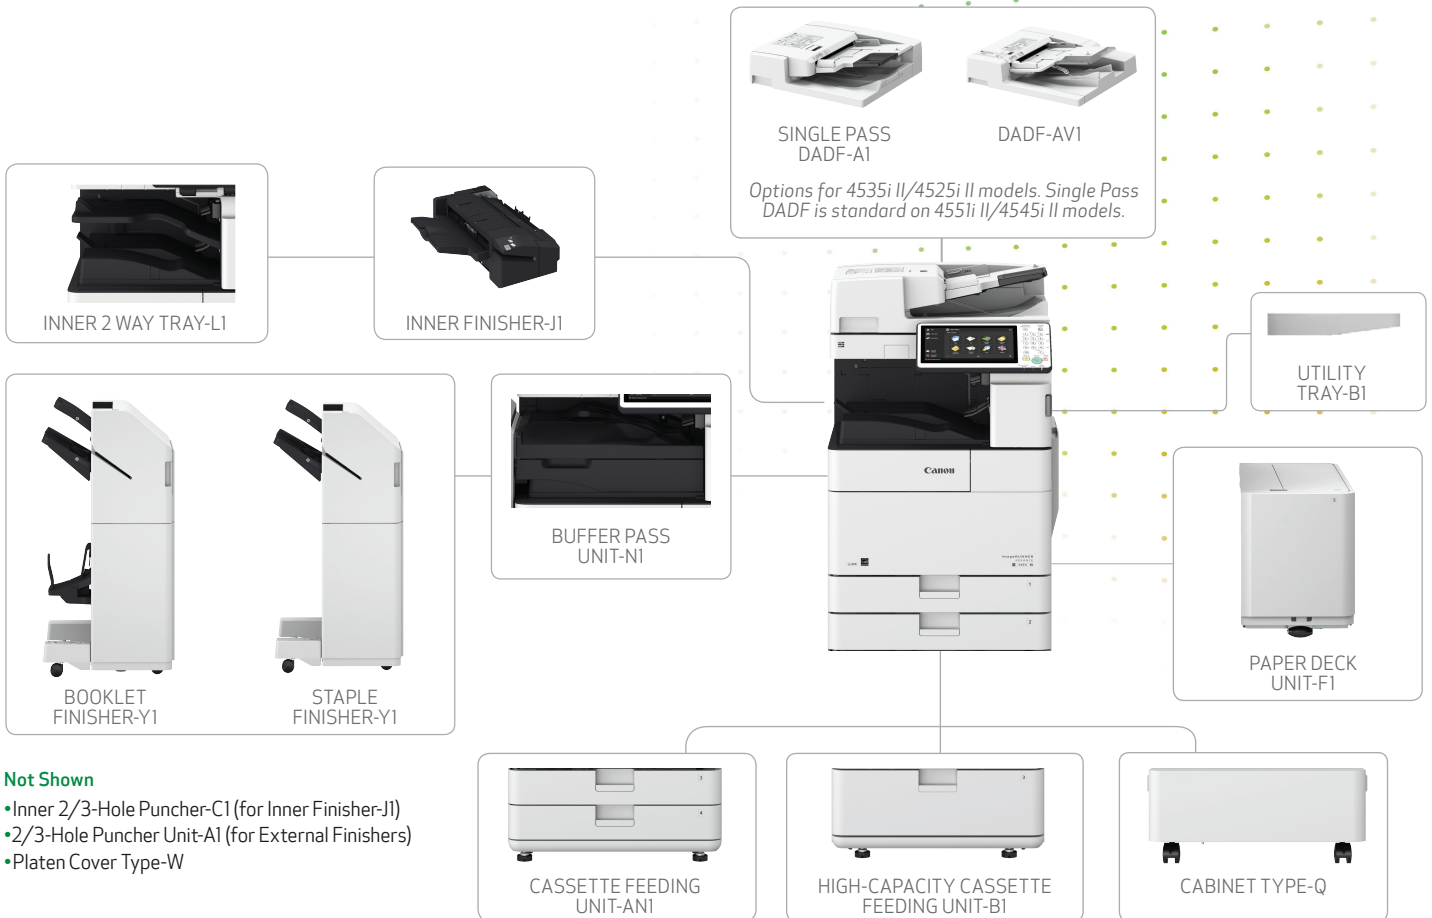

Not Shown

- Inner 2/3-Hole Puncher-C1 (for Inner Finisher-J1)
- 2/3-Hole Puncher Unit-A1 (for External Finishers)
- Platen Cover Type-W

Main Unit

Type

Monochrome Laser Multifunctional

Core Functions

Standard: Print, Copy, Scan, Send, Store
 Optional: Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

10.1" TFT LCD WSVGA Color Touch-panel

Memory

3.0 GB RAM

Hard Disk Drive

Standard: 250 GB
 Maximum: 1 TB

Mirroring Hard Disk Drive

Optional (250 GB, 1 TB)
 Method: Raid1

Print Resolution

1200 dpi x 1200 dpi

Interface Connection

Network

Standard: 1000Base-T/100Base-TX/10Base-T,
 Wireless LAN (IEEE 802.11 b/g/n)

Optional: NFC, Bluetooth

Others

Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host),
 USB 2.0 x1 (Device)

Optional: Serial Interface, Copy Control Interface

Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,185 Sheets
 Maximum: 6,335 Sheets

Paper Sources (LTR, 20 lb. Bond)

Standard: Two 550-sheet Paper Cassettes,
 85-sheet Stack Bypass

Optional: Two 550-sheet Paper Cassettes (Cassette Feeding Unit-ANI), 2,450-sheet Paper Deck (High Capacity Cassette Feeding Unit-B1), 2,700-sheet Paper Deck (Paper Deck Unit-F1)

Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets
 Maximum: 3,350 Sheets (with External Finishers)

Finishing Capabilities

Standard: Collate, Group

With Inner Finisher: Collate, Group, Offset, Staple, Hole Punch,¹ Staple-Free Staple, Staple On Demand

With External Finisher: Collate, Group, Offset, Staple, Booklet,² Staple-Free Staple, Staple On Demand, Hole Punch³

Supported Media Types

Paper: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Stack Bypass: Thin, Plain, Recycled, Color, Heavy, Pre-punched, Bond, Transparency, Label, Envelope

Supported Media Sizes

Paper Cassette (1): Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")

Paper Cassette (2): 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 17")

Stack Bypass: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")

Supported Media Weights

Paper Cassettes: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Stack Bypass: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Duplexing: 16 lb. Bond to 28 lb. Bond (60 to 105 g/m²)

Warm-up Time

From Power On: 24 Seconds or Less
From Deep Sleep Mode: 10 Seconds or Less
Quick Startup Mode: 4 Seconds⁴

Dimensions (W x D x H)

23-1/8" x 29-1/8" x 47" (587 mm x 740 mm x 1,193 mm)⁵

Installation Space (W x D)

Basic [With ADF (Stack Bypass and Cassette Drawers Open)]: 35" x 46-1/2" (889 mm x 1,182 mm)
Fully Configured [With ADF+Paper Deck Unit-F1+Booklet Finisher-Y1 (Cassette Drawers Open)]: 71-3/8" x 50-3/8" (1,811 mm x 1,280 mm)

Weight

Approx. 240.7 lb. (109.2 kg)⁶

Print Specifications

Print Speed

455i II:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i II:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i II:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i II:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

Standard Page Description Languages

UFR II, PCL[®] 6, Adobe[®] PS[®] 3

Direct Print

Available from USB, Advanced Box, Remote UI, and Web Access (Opt.)⁷

Supported File Types for Direct Print

PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are available to provide printing from mobile devices or Internet-connected devices and cloud-based services depending on your requirements.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese),⁸ Barcode Fonts⁹

PS fonts: 136 Roman

Operating System¹⁰

UFR II: Windows Vista[®]/Server 2008/Windows[®] 7/Server 2008 R2/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7 or later)
PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Server 2012/Server 2012 R2/Windows 10/Server 2016
PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7 or later)
PPD: MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 8.1/Windows 10

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Forced Hold Printing, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Toner Reduction, Poster Printing

Copy Specifications

Copy Speed

455i II:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i II:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i II:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i II:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

First-Copy-Out Time (Letter)

455i II:	As fast as 3.7 seconds
4545i II:	As fast as 3.8 seconds
4535i II:	As fast as 3.8 seconds
4525i II:	As fast as 5.2 seconds

Copy Resolution (dpi)

Reading: Up to 600 x 600
Printing: 1200 x 1200

Multiple Copies

Up to 999 Copies

Copy Exposure

Automatic or Manual (9 Levels)

Magnification

25%-400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different-size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Detect Feeder Multi Sheet Feed, Free Size Original

Scan Specifications

Type

455i II/4545i II:	Standard Single Pass Duplexing Automatic Document Feeder
4535i II/4525i II:	Optional Single Pass Duplexing Automatic Document Feeder or Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

Single Pass DADF-A1: 150 Sheets (20 lb. Bond)
DADF-AV1: 100 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

Document Feeder Supported Media Weights

Single Pass DADF-A1	
BW Original:	13 lb. Bond to 58 lb. Cover (50 to 157 g/m ²)
CL Original:	17 lb. Bond to 58 lb. Cover (64 to 157 g/m ²)
DADF-AV1	
BW Original:	13 lb. Bond to 34 lb. Bond (50 to 128 g/m ²)
CL Original:	17 lb. Bond to 34 lb. Bond (64 to 128 g/m ²)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2 kg)]

Pull Scan

Color Network ScanGear2 for both Twain and WIA
Supported OS: Windows Vista/7/8.1/10
Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016

Scan Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to mobile devices and cloud-based services depending on your requirements.

Scan Speed (Letter)

Single Pass DADF-A1
Single-sided Scanning
BW: 80 ipm (300 dpi)/80 ipm (600 dpi)
Color: 80 ipm (300 dpi)/60 ipm (600 dpi)
Double-sided Scanning
BW: 160 ipm (300 dpi)/150 ipm (600 dpi)
Color: 160 ipm (300 dpi)/80 ipm (600 dpi)
DADF-AV1
Single-sided Scanning
BW: 70 ipm (300 dpi)/51 ipm (600 dpi)
Color: 70 ipm (300 dpi)/51 ipm (600 dpi)
Double-sided Scanning
BW: 35 ipm (300 dpi)/25.5 ipm (600 dpi)
Color: 35 ipm (300 dpi)/25.5 ipm (600 dpi)

Send Specifications

Destination

E-mail/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 Fax (Optional), IP Fax (Optional)

Color Mode

Automatic-Color Select (Full Color/Grayscale), Automatic-Color Select (Full Color/Black-and-White), Full color, Grayscale, and Black-and-White

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

Communication Protocol

File: FTP, SMB v3.0, WebDAV
E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF (Encrypted, Compact, Searchable, Apply Policy, Optimize for Web, PDF A/1-b), XPS (Compact, Searchable), Office Open XML (PowerPoint[®], Word), Digital Signature (PDF/XPS)
Optional: PDF (Trace & Smooth)

Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Detect Feeder Multi Sheet Feed

Fax Specifications

Maximum Number of Connection Lines

4

Modem Speed

Super G3: 33.6 Kbps
G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 Pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Sender's Name (TTI), Select Line, Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

Store Specifications

Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV Supported
Client PC: Windows (Windows Vista/7/8/8.1/10)
Concurrent Connections (Max.):
SMB: 64
WebDAV: 3 (Active Sessions)

Advanced Box Available Disk Space

Approx. 16 GB (Standard HDD)
Approx. 480 GB (1 TB HDD)

Advanced Box Features

Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB

Security Specifications

Authentication

Standard: Universal Login Manager, uniFLOW Online Express,^{11,12} User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in
Optional: uniFLOW

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated)
Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: Encrypted Secure Print, IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

Document

Standard: Secure Watermark, Secure Print, Forced Hold Printing, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signatures
Optional: User Signatures, Document Scan Locking

Environmental Specifications

Operating Environment

Temperature: 50 to 86°F
Humidity: 20 to 80% RH (no condensation)

Power Requirements

455li II: 120-127 V AC, 60 Hz, 10.4A
4545i II/4535i II: 120-127 V AC, 60 Hz, 9.3A
4525i II: 120-127 V AC, 60 Hz, 7A

Plug (Main Unit)

NEMA 5-15P

Power Consumption

Maximum: Approx. 1.5 kWh
Standby: Approx. 38 W
Sleep Mode: Approx. 0.9 W¹³
Typical Electricity Consumption (TEC) Rating:
455li II: 2.5 kWh
4545i II: 2.2 kWh
4535i II: 1.8 kWh
4525i II: 1.0 kWh

Standards

ENERGY STAR® Certified
Rated EPEAT® Gold⁴
RoHS Compliant

Consumables

Toner

GPR-57 Toner BK

Toner Yield (Estimated @ 6% Coverage)

Black: 42,100 Images

Paper Supply Options

CASSETTE FEEDING UNIT-ANI

Paper: 550 sheets x 2 Cassettes
Capacity: [20 lb. Bond (80 g/m²)]
Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched
Paper Size: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, and Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (139.7 x 182.0 to 297.0 x 431.8 mm)]
Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Power Source: From the Main Unit
Dimensions: 22-1/4" x 25-5/8" x 9-3/4" (W x D x H): (565 mm x 650 mm x 248 mm)
Weight: 51.8 lb. (23.5 kg)

HIGH CAPACITY CASSETTE FEEDING UNIT-BI

Paper: 2,450 sheets [20 lb. Bond (80 g/m²)]
Capacity:
Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched
Paper Size: Letter
Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Power Source: From the Main Unit
Dimensions: 22-1/4" x 25-5/8" x 9-3/4" (W x D x H): (565 mm x 650 mm x 248 mm)
Weight: 61.7 lb. (28 kg)

PAPER DECK UNIT-FI

Paper: 2,700 Sheets [20 lb. Bond (80 g/m²)]
Capacity:
Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched
Paper Size: Letter
Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Power Source: From the Main Unit
Dimensions: 15-3/4" x 24-7/8" x 17-3/8" (W x D x H): (400 mm x 630 mm x 440 mm)
Weight: 68.3 lb. (31 kg)

Output Options

INNER 2-WAY TRAY-L1

Number of Trays: 2
Total Output Capacity
Upper Tray: 100 Sheets
Lower Tray: 250 Sheets
Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Paper Size (Standard): 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")
Dimensions (W x D x H): 16-3/4" x 16-1/4" x 4-1/4" (426 mm x 413 mm x 109 mm)
Weight: 1.7 lb (0.77 kg)

INNER FINISHER-J1

Number of Trays: 2
Top Tray: Letter/Statement-R/Executive (45 Sheets), 11" x 17"/Legal/Letter-R (45 Sheets)
Lower Tray: Letter/Statement-R/Executive (500 Sheets), 11" x 17"/Legal/Letter-R (250 Sheets)
Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Staple Position: Corner, Double
Staple Capacity
Corner Staple and Double Staple
Letter/
Executive: 50 Sheets (14 to 24 lb. Bond) 11" x 17"/Legal/
Letter-R: 30 Sheets (14 to 24 lb. Bond)
Staple-Free Staple:
11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m²)]
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)]
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]

Staple On Demand: 40 Sheets [20 lb. Bond (80 g/m²)]

Power Source: From the Main Unit
Dimensions: 25" x 21-1/8" x 8-1/8" (W x D x H): (636 mm x 535 mm x 205 mm)
Weight: Approx. 15.9 lb (7.2 kg)

STAPLE FINISHER-Y1 (External)

Number of Trays: 2
Top Tray: Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray: Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)
Paper Weight
Top Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Lower Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Staple Position: Corner, Double

Staple Capacity
Corner Staple and Double Staple
Letter/
Executive: 50 Sheets [24 lb. Bond (90 g/m²)] 11" x 17"/Legal/
Letter-R: 30 Sheets [24 lb. Bond (90 g/m²)]
Staple-Free Staple
11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m²)]
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)]
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]

Staple On Demand: 50 Sheets [24 lb. Bond (90 g/m²)]

Power Source: From the Main Unit
Dimensions: 25-1/8" x 24-1/2" x 45" (W x D x H): (637 mm x 623 mm x 1,142 mm)¹³
Weight: Approx. 68.3 lb (31 kg)

BOOKLET FINISHER-Y1 (External)

Number of Trays:	2
Top Tray Capacity:	Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:	Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)
Paper Weight Top Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Lower Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Staple Position:	Corner, Double
Staple Capacity:	Corner Staple and Double Staple
Letter/Executive:	50 Sheets [24 lb. Bond (90 g/m ²) 11" x 17"/Legal/
Letter-R:	30 Sheets [24 lb. Bond (90 g/m ²)
Staple-Free Staple 11"x17"/Letter:	5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m ²)] 4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m ²)] 3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m ²)]
Staple On Demand:	50 Sheets [24 lb. Bond (90 g/m ²)
Booklet-Stitch Paper Size:	11" x 17", Legal, Letter-R, Custom Size (7-3/4" x 10-5/8" to 11-3/4" x 17")
Booklet-Stitch Staple Capacity:	20 Sheets x 10 Sets [22 lb. Bond (81 g/m ²)] [including one cover sheet up to 80 lb. Cover (220 g/m ²)]
Power Source:	From the Main Unit
Dimensions (W x D x H):	25-1/8" x 24-1/2" x 45" (637 mm x 623 mm x 1,142 mm) ¹³
Weight:	Approx. 125.7 lb (57 kg)

INNER 2/3-HOLE PUNCHER-C1

(Requires the Inner Finisher-J1)

Acceptable Punch Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Acceptable Punch Paper Size:	Two holes: 11" x 17", Legal, Letter, Letter-R, Executive Three holes: 11" x 17", Letter, Executive
Power Source:	From the Main Unit

2/3-HOLE PUNCHER UNIT-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)

Acceptable Punch Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Acceptable Punch Paper Size:	Two holes: 11" x 17", Legal, Letter, Letter-R, Executive Three holes: 11" x 17", Letter, Executive
Power Source:	From the Main Unit

Additional Hardware Options

Card Readers

MICARD PLUS PROXIMITY CARD READER
COPY CARD READER-F1
COPY CARD READER ATTACHMENT-B5

Others

PLATEN COVER TYPE W
ENVELOPE FEEDER ATTACHMENT KIT-D1
UTILITY TRAY-B1
USB KEYBOARD

Security Options

Document Security

DOCUMENT SCAN LOCK KIT-B1
iR-ADV SECURITY KIT-S1 FOR IEEE 2600 COMMON CRITERIA CERTIFICATION¹⁶

Data Security

HDD MIRRORING KIT-J1
2.5"/250 GB HDD-N1
2.5"/1 TB HDD-P1
REMOVABLE HDD KIT-AL1

System and Controller Options

Print Accessories

PCL INTERNATIONAL FONT SET-A1

Barcode Printing

BARCODE PRINTING KIT-D1

System Accessories

WEB ACCESS SOFTWARE-K1
SERIAL INTERFACE KIT-K3
COPY CONTROL INTERFACE KIT-A1
CONNECTION KIT-A1 FOR BLUETOOTH LE
NFC KIT-C1
MEAP WEB CONNECTION KIT-G3¹⁷

Fax Accessories

SUPER G3 FAX BOARD-AS2
SUPER G3 2ND LINE FAX BOARD-AS2
SUPER G3 3RD/4TH LINE FAX BOARD-AS2
REMOTE FAX KIT-A1
IP FAX EXPANSION KIT-B1

Other Options

Accessibility Accessories

ADF ACCESS HANDLE-A1
VOICE GUIDANCE KIT-G1
VOICE OPERATION KIT-D1
BRAILLE LABEL KIT-F1

Consumables

STAMP INK CARTRIDGE-C1
STAPLE-P1
STAPLE CARTRIDGE-Y1

- ¹ Requires the optional Inner 2/3 Hole Puncher-C1.
- ² Booklet Finisher-Y1 only.
- ³ Requires the optional 2/3 Hole Puncher Unit-A1.
- ⁴ Time from device power-on to when copy jobs can be programmed.
- ⁵ Includes Main Unit, Single Pass DADF-A1, and Cassette Feeding Unit-AN1.
- ⁶ Includes Main Unit, Single Pass DADF-A1, Cassette Feeding Unit-AN1, and consumables.
- ⁷ PDF print from Web sites is supported.
- ⁸ Requires the optional PCL International Font Set-A1.
- ⁹ Requires the optional Barcode Printer Kit-D1.
- ¹⁰ Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- ¹¹ No charge for this solution; however activation is required.
- ¹² Check for availability.
- ¹³ 0.9 W Sleep mode is not available in all circumstances due to certain settings.
- ¹⁴ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.
- ¹⁵ When the extension tray is extended.
- ¹⁶ Will launch at a later date.
- ¹⁷ No charge for this option; however it does need to be ordered.

USA.CANON.COM/SIMPLYADVANCED



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. II indicates that this model has been upgraded to new system software and includes additional security features as standard. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2018 Canon U.S.A., Inc. All rights reserved.

