




CANON SOLUTIONS AMERICA

imagePRESS V1350

COLOR PRODUCTION
DIGITAL PRESS

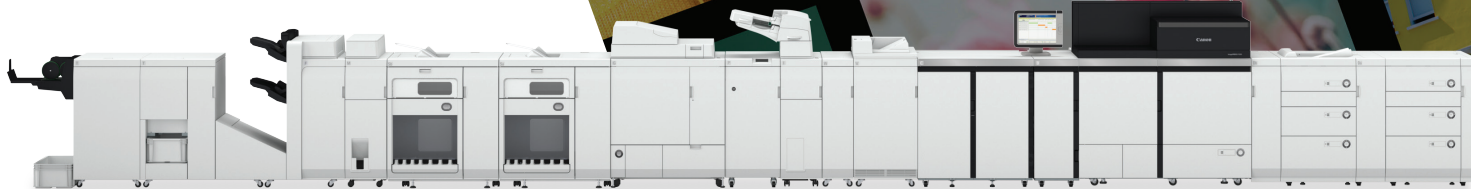

imagePRESS V1350 shown with optional accessories.

Product Specifications

Marking Engine

Technology Electrophotography

Print Resolution 2400 x 2400 dpi

Print Speed

8.5" x 11":	Up to 135 ipm
11" x 17":	Up to 76 ipm
12" x 18":	Up to 72 ipm
13" x 19":	Up to 69 ipm
13" x 30":	Up to 28 ipm

Paper Size 7.2" x 7.2" to 13" x 19.2"

Paper Capacity¹

Standard:	Up to 1,000 Sheets
Maximum:	Up to 10,000 Sheets

Paper Weight 16 lb. Bond to 190 lb. Cover
(60 gsm to 500 gsm)

Long Sheets² Up to 13" x 30"

Automatic Duplexing

Paper Size: ²	Up to 13" x 30"
Paper Weight:	Up to 190 lb. Cover (500 gsm)

Average Monthly Print Volume 75,000 to 1,200,000

Duty Cycle² Up to 2,400,000

Power Source Three-Phase 208 V, 60 Hz, 30 A
Single-Phase 208 V, 60 Hz, 20 A

Weight 2,348 lb.

Dimensions 105.9" W x 45.9" D x 57.3" H

Input Accessories

POD Deck-E1

Paper Capacity: ¹	Up to 4,000 Sheets
Attach Inline:	Up to 2
Paper Size:	7.2" x 7.2" to 13" x 19.2"
Paper Weight:	16 lb. Bond to 190 lb. Cover (60 gsm to 500 gsm)
Power Source:	200 - 208 V, 60 Hz, 15 A
Weight:	551 lb.
Dimensions:	38.7" W x 31.2" D x 43.1" H

BDT VX 370 - 790 Long Sheet Feeder⁴

Paper Capacity: ¹	Up to 5,000 Sheets
Paper Size:	11" x 17" to 13" x 30"
Paper Weight:	16 lb. Bond to 150 lb. Cover (60 gsm to 400 gsm)
Weight:	1,146.3 lb.
Dimensions:	51.2" W x 42.7" D x 38.4" H

Finishing Accessories

Sensing Unit-B1⁵	Tasks:	Front-to-Back Alignment, Color Accuracy Check, Cross Shade Adjustment, Secondary Transfer Adjustment
	Paper Weight:	16 lb. Bond to 190 lb. Cover (60 gsm to 500 gsm)
	Paper Size:	7.2" x 7.2" to 13" x 30"
	Power Supply:	100 – 240 V, 50/60 Hz, 2.5 A
	Weight:	222 lb.
	Dimensions:	20.2" W x 29.5" D x 48.3" H

Inspection Unit-B1^{5,6}	Paper Types:⁷	Plain Paper, Coated Paper
	Paper Weight:	16 lb. Bond to 190 lb. Cover (60 gsm to 500 gsm)
	Paper Size:	7.2" x 7.2" to 13" x 30"
	Detection Size:	0.2 mm x 0.2 mm to 1.4 mm x 1.4 mm
	Scanning Width:	Up to 11.9"
	Inspection Workstation	
	Inspection Tool OS:	Windows® 10 Pro
	Mode:	Log Only, Purge and Recovery
	Inspection Location:	Up to 64
	Intensity Level:	9 Levels
	Objects:	Position Gap, Dot of Dirt, Streak of Dirt
	Auto Recovery:	Yes (Purge and Recovery Mode only)
	Purge Unit:	High-Capacity Stacker-J1
	Dimensions:	9.8" x 31.2" x 40.9"
	Power Supply:	100-240 V, 50/60 HZ, 1.4 A

Document Insertion Unit-R1⁵	Tray Capacity¹	
	Upper Tray:	Up to 200 Sheets
	Lower Tray:	Up to 200 Sheets
	Paper Weight:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Paper Size:	7.2" x 7.2" to 13" x 19.2"
	Power Supply:	100 – 240 V, 50/60 Hz, 1.0 A
	Weight:	134 lb.
	Dimensions:	29.4" W x 31.2" D x 55.4" H

Multi Function Professional Puncher-C1⁵	Paper Weight	
	Punching:	20 lb. Bond to 110 lb. Cover (75 gsm to 300 gsm)
	Creasing:	110 lb. Text to 110 lb. Cover (157 gsm to 300 gsm)
	Paper Size	
	Punching (Single):	Letter-R, Letter, Legal, 11" x 17", 12" x 18"
	Punching (Double):	Letter-R, Legal, 11" x 17", 12" x 18"
	Creasing:	Letter-R, 11" x 17", 12" x 18", 13" x 19"
	Die Set Patterns:	Loose Leaf 3-Hole/5-Hole, Velo Bind 11-Hole, Plastic Comb 19-Hole, Twin Loop 21-Hole/32-Hole, Color Coil 44-Hole, Crease
	Power Supply:	115 V, 60 Hz, 3.8 A
	Weight:	225 lb.
	Dimensions:	17.5" W x 31.3" D x 40.9" H

GBC eWire Pro^{5,8}	Bound Book Size:¹	15 to 100 Sheets
	Paper Size:	Letter
	Paper Weight:	20 lb. Bond to 110 lb. Cover (75 gsm to 300 gsm)
	Wire Choices:	1/4", 5/16", 3/8", 7/16", 1/2", 9/16"
	Stack Capacity:¹	Up to 35 Books
	Infeed:	Multi Function Professional Puncher-B1
	Power Supply:	115 V, 60 Hz, 2.8 A
	Weight:	500 lb.
	Dimensions:	35.8" W x 31.3" D x 42.6" H

Perfect Binder-F1^{5,6}	Finished Book Size:	5.4" x 8.0" to 8.5" x 11.7"
	Book Thickness:¹	10 to 200 Sheets
	Paper Weight	
	Body Pages:	16 lb. Bond to 110 lb. Text (60 gsm to 163 gsm)
	Cover Page:	4 lb. Bond to 110 lb. Cover (90 gsm to 300 gsm)
	Trimming Method:	3-Side Cut/1-Side Cut/No Cut
	Trim Range	
	Top/Bottom:	0.26" to 1.6"
	Side:	0.26" to 1.95"
	Power Source:	208 V, 60 Hz, 3.0 A
	Weight:	679 lb.
	Dimensions:	36.3" W x 31.1" D x 51.2" H

High Capacity Stacker-J1⁶	Stack Capacity:¹	Up to 6,000 Sheets
	Top Tray Capacity:¹	Up to 200 Sheets
	Attach Inline:	Up to 2
	Paper Size:	7.2" x 7.2" to 13" x 19.2"
	Paper Weight:	16 lb. Bond to 190 lb. Cover (60 gsm to 500 gsm)
	Power Source:	100 - 240 V AC, 50/60 Hz, 2.5 A
	Weight:	265 lb.
	Dimensions:	35.4" W x 29.3" D x 44.9" H

Finishing Accessories (Continued):

Plockmatic Multi Purpose Stacker ^{6,7}	Stack Height	
	Sheets < 25.6":	Up to 11.8"
	Sheets > 25.6":	Up to 5.3"
	Paper Size:	8.3" x 11" to 13" x 30"
	Paper Weight:	100 lb. Text to 130 lb. Cover (148 gsm to 350 gsm)
	Power Source:	100 – 240 V, 50/60 Hz, 2 A
	Weight:	168 lb.
Dimensions:		41.8" W x 35.4" D x 26.8" H

Paper Folding Unit-K1 ⁸	Double Parallel Fold:	Legal, Letter-R
	C/Accordion Fold:	Letter-R
	Z-Fold:	Letter-R, 11" x 17"
	Paper Weight:	16 lb. Bond to 28 lb. Bond (60 gsm to 105 gsm)
	Power Source:	From Finisher
	Weight:	157 lb.
	Dimensions:	13.2" W x 31.2" D x 46.9" H

Staple Finisher-AF1/Booklet Finisher-AF1	Tray Capacity ¹	
	Top Tray:	Up to 1,000 Sheets
	Lower Tray:	Up to 4,000 Sheets
	Saddle-Stitch Tray:	Continuous by Belt
	Paper Weight	
	Stacking:	16 lb. Bond to 190 lb. Cover (60 gsm to 500 gsm)
	Corner Stapling:	16 lb. Bond to 120 lb. Cover (60 gsm to 325 gsm)
	Booklet-Making:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Staple Positions:	Corner, Double
	Paper Size	
	Stapling:	8.3" x 7.2" to 11.7" x 17
	Saddle Finisher:	8.3" x 11" to 13" x 19.2"
	Stapling Capacity ¹	
	Corner/Double:	Up to 100 Sheets
	Saddle-Stitch:	Up to 25 Sheets
	V-Fold:	Up to 5 Sheets without Stitch
	Power Source:	120 - 240 V, 60 Hz, 8 A
	Weight	
	Staple Finisher:	287 lb.
	Booklet Finisher:	397 lb.
Dimensions:		31.5" W x 31.2" D x 48.8" H

Puncher Unit-BS1 ⁹	Paper Sizes:	
	2-Hole:	7.2" x 7.2" to 11.7" x 17"
	3-Hole:	9.5" x 7.2" to 11.7" x 17"
	Paper Weight:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Punch Waste Capacity:	Up to 6,000 Sheets
Power Supply:		From Finisher

Long Sheet Catch Tray XL-B1 ⁹	Paper Capacity ¹	
	Up to 13" x 30":	Up to 300 Sheets
	Paper Size:	7.2" x 7.2" to 13" x 51.2"

DFD Adapter and Finisher Bridge-B1 ⁹	Supported Finishing:	Plockmatic BLM50/35 Professional Booklet Maker
	Requirements:	Staple/Booklet Finisher-W1
	Weight:	168 lb.
	Dimensions:	35.8" W x 29.3" D x 46.9" H

Booklet Trimmer-G1 ¹²	Margin Trimming:	Front-edge Trim
	Trim Amount:	0.08" to 1.1"
	Paper Weight:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Power Supply:	From Finisher
	Weight:	392 lb.
Dimensions:		82.5" W x 31.1" D x 40.9" H

Two-Knife Booklet-B1 ¹¹	Margin Trimming:	Top and Bottom
	Trim Amount:	0.08" to 0.59"
	Paper Weight:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Power Supply:	120 - 127 V, 60 Hz, 4 A
	Weight:	320 lb.
Dimensions:		43.7" W x 30.3" D x 40.9" H

SDD Square-Fold Booklet-Maker ¹¹	Booklet Capacity: ¹	Up to 25 Sheets
	Booklet Input Size:	5.5" x 8.27" to 9.6" x 12.6"
	Paper Weight:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Power Supply:	120 V, 60 Hz, 15 A
	Weight:	154 lb.
	Dimensions:	43.3" W x 23.6" D x 44.9" H

Finishing Accessories (Continued):

SDD Square-Fold Booklet-Maker with Two-Knife Trim¹¹	Booklet Capacity:¹	Up to 25 Sheets
	Booklet Input Size:	5.5" x 8.27" to 9.6" x 12.6"
	Paper Weight:	16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
	Trim Amount:	0.08" to 1.38"
	Power Supply:	120 V, 60 Hz, 15 A
	Weight:	573 lb.
	Dimensions:	62.7" W x 27.6" D x 51.2" H

Plockmatic BLM50/35 Professional Booklet-Maker¹²	Booklet Size:¹	Up to 30/50 Sheets
	Paper Size:	8.1" x 10.8" to 12.6" x 18"
	Paper Weight	
		Uncoated: 16 lb. Bond to 110 lb. Cover (60 gsm to 300 gsm)
		Coated: 28 lb. Bond to 110 lb. Cover (105 gsm to 300 gsm)
	Trim Amount	
		Face: ¹⁵ 0.04" to 1"
		Top/Bottom: ¹⁶ 0.196" to 1.18"
	Paper Rotating:¹⁶	8.1" x 10.9" to 9.1" x 12.7"
	Weight:	1,235.7 lb.
	Dimensions:	131.1" W x 33.8" D x 42.5" H

Print Servers

PRISMAsync Print Server⁷	System Software:	Version 9
	CPU:	Intel® Core i7 4770S @ 3.1 GHz
	Memory:	16 GB
	Hard Drive:	1.5 TB
	OS:	Windows® 10
	Standard:	Scheduler, DocBox, G7 Calibration, Page Programmer, Remote Manager, PRISMAlytics Dashboard, Automated Workflows, Multiple Queues, Remote Control
	Optional:	E-Shredding, Advanced Imposition

imagePRESS Server E9000	Fiery System:	FS500 Pro
	CPU:	Intel® Xeon® Dual 12 Core Processor
	Memory:	32 GB
	Hard Drive:	512 GB SSD + 2 x 2 TB
	OS:	Windows 10
	Standard:	Impose, Compose, Command Workstation, Spot-On, Hot Folders, Virtual Printers, Media Librarian, Graphic Arts Pro Package, Color Right Package
	Optional:	Job Master, JobFlow

¹ Based on 20 lb. Bond.

² BDT VX 370-790 Long Sheet Feeder required.

³ Based on Letter, simplex impressions.

⁴ POD Deck-E1 required.

⁵ High-Capacity Stacker-J1 and/or Staple Finisher-AF1/Booklet Finisher-AF1 required.

⁶ Multi Function Professional Puncher-C1 and Perfect Binder-F1 cannot be installed with Inspection Unit.

⁷ Mixed media jobs not supported.

⁸ Multi Function Professional Puncher-C1 required.

⁹ Staple Finisher-AF1 or Booklet Finisher-AF1 required.

¹⁰ Booklet Finisher-AF1 required.

¹¹ Booklet Trimmer-G1 required.

¹² High-Capacity Stacker-J1 or DFD Adapter and Finisher Bridge-B1 required.

¹³ SDD Front Trimmer required.

¹⁴ SDD Rotator required.

¹⁵ FTR50 Trimmer Module required.

¹⁶ RCT50 Rotate Crease Trim Module required.

For more information,
call 1.800.815.4000
or visit csa.canon.com



As an ENERGY STAR® Partner, Canon U.S.A., Inc. qualified this model as meeting the ENERGY STAR® energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon and imagePRESS are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. PRISMA is a registered trademark of Canon Production Printing Netherlands B.V. All other referenced product names and marks are trademarks of their respective owners. Some printer output images may be simulated. Specifications and availability subject to change without notice. Not responsible for typographical errors.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc., Canon Solutions America, Inc., and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims on unauthorized copying.

©2022 Canon U.S.A., Inc. All rights reserved.

CSA-22-1581-7693

1222R1-IPV1350SS-PDF-IH



Canon
CANON SOLUTIONS AMERICA

